

# REAR BLADES

## RB15 SERIES


Up to 25 HP • 48", 60"

## RB20 SERIES

Up to 40 HP • 60", 72", 84"

## RB22 SERIES

Up to 60 HP • 60", 72", 84"

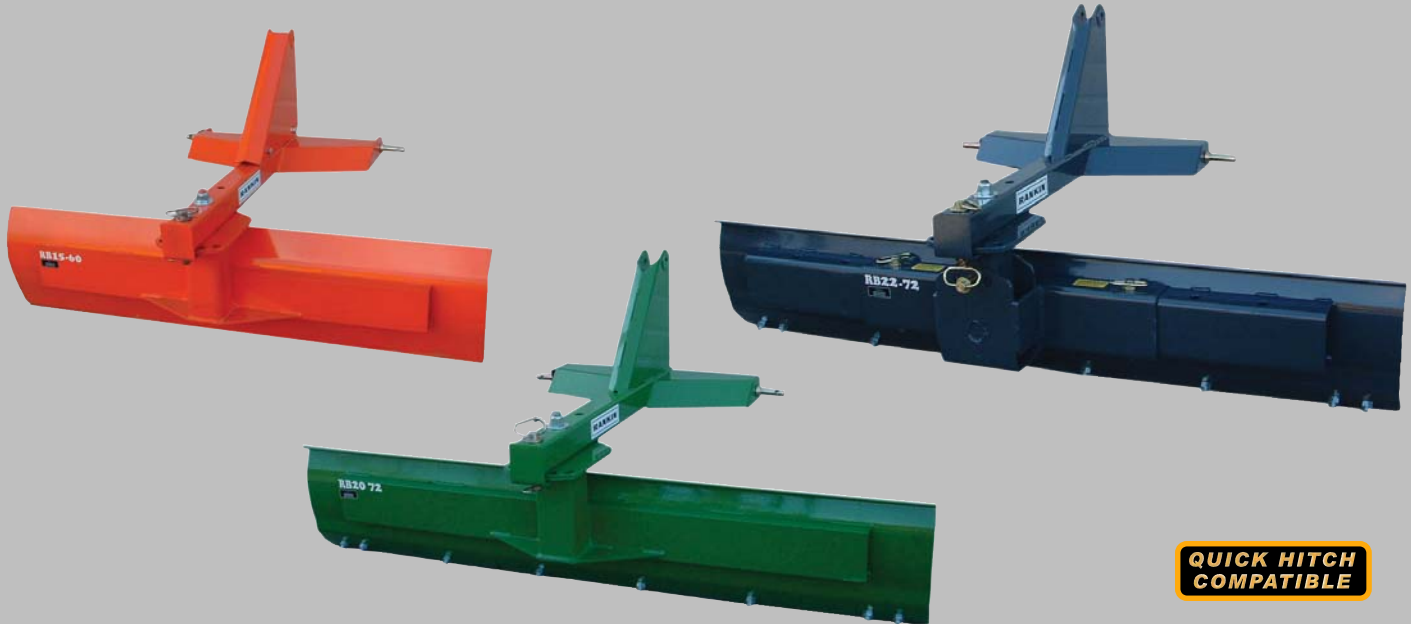

RB15, RB20 & RB22 SERIES REAR BLADES are ideal for landscaping, road and driveway maintenance and snow removal. The **15 Series** is available in 48" and 60" widths for subcompact tractors up to 25 H.P. The 15" x 3/16" moldboard has 5 forward and reverse angle positions and is equipped with a 3/8" x 3" welded cutting edge. The **20 and 22 Series** are available in 60" and 72" widths for tractors up to 40 H.P. The 15" x 3/16" moldboard has five forward and reverse angle settings and is equipped with a 1/2" x 6" cutting edge. The **22 Series** rear blades feature manual pin adjustments for tilt and offset.

### SPECIFICATIONS

MODELS	RB15-48	RB15-60	RB20-60	RB20-72	RB20-84	RB22-60	RB22-72	RB22-84
MOLDBOARD WIDTH	48"	60"	60"	72"	84"	60"	72"	84"
MOLDBOARD HEIGHT & THICKNESS	15" x 3/16"	15" x 3/16"	15" x 3/16"	15" x 3/16"	15" x 3/16"	15" x 3/16"	15" x 3/16"	15" x 3/16"
MOLDBOARD CUTTING EDGE	3/8" x 3" Welded	3/8" x 3" Welded	1/2" x 6" Reversible	1/2" x 6" Reversible	1/2" x 6" Reversible	1/2" x 6" Reversible	1/2" x 6" Reversible	1/2" x 6" Reversible
HITCH	Cat. 1	Cat. 1	Cat. 1	Cat. 1	Cat. 1	Cat. 1	Cat. 1	Cat. 1
WEIGHT	164	180	223	250	290	277	304	355
MAX. TRACTOR HP	25	25	40	40	40	40	40	40
TILT ADJUSTMENT	No	No	No	No	No	Yes	Yes	Yes
OFFSET ADJ.	No	No	No	No	No	6" or 12"	6" or 12"	6" or 12"
PACKING STAND	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional

Specifications subject to change without notice

**RANKIN**

Innovative High Quality Products

Designed to Save Time and Labor

# REAR BLADES

## RB30 SERIES

Up to 60 HP • 72", 84"



## RB40 SERIES

Up to 75 HP • 72", 84", 96"



**QUICK HITCH  
COMPATIBLE**

RB30 & RB40 SERIES REAR BLADES are ideal for landscaping, road and driveway maintenance and snow removal. The **30 Series** is available in 72" and 84" widths for tractors up to 60 H.P. The **40 Series** is available in 72", 84" and 96" widths for tractors up to 75 H.P. The 16" x ¼" moldboard has five forward and reverse angle settings and is equipped with a ½" x 6" cutting edge. The **30 and 40 Series** rear blades also feature manual pin and ratchet jack offset capabilities. A cylinder can be installed to function the offset capabilities hydraulically.

### SPECIFICATIONS

MODELS	RB30-72	RB30-84	RB40-72	RB40-84	RB40-96
MOLDBOARD WIDTH	72"	84"	72"	84"	96"
MOLDBOARD HEIGHT & THICKNESS	16" x 1/4"	16" x 1/4"	16" x 1/4"	16" x 1/4"	16" x 1/4"
MOLDBOARD CUTTING EDGE	1/2" x 6" Reversible	1/2" x 6" Reversible	1/2" x 6" Reversible	1/2" x 6" Reversible	1/2" x 6" Reversible
HITCH	Cat. 1 & 2	Cat. 1 & 2	Cat. 1 & 2	Cat. 1 & 2	Cat. 1 & 2
WEIGHT	475	515	503	541	578
MAXIMUM TRACTOR HP	60	60	75	75	75
TILT ADJ.	Yes	Yes	Yes	Yes	Yes
OFFSET ADJ.	Yes	Yes	Yes	Yes	Yes
PARKING STAND	Standard	Standard	Standard	Standard	Standard

*Specifications subject to change without notice*

**RANKIN**

Innovative High Quality Products